


Trasformatore monofase IP20 Single phase transformer IP20

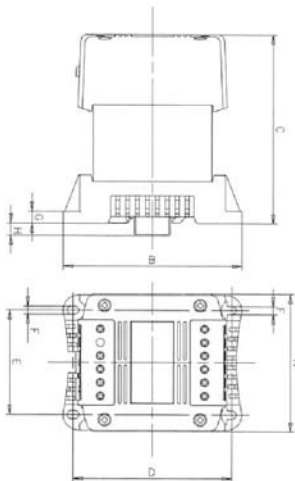

Ta 40 °C	Ta 25 °C	A	B	C	D	E	F	G	H	Kg
25	40	84	113	96	101	66	5	7,5	2	1,17
40	63	84	113	105	101	66	5	7,5	2	1,48
63	100	84	113	112	101	66	5	7,5	2	1,83
100	160	84	113	116	101	66	5	7,5	2	2,00
160	200	84	113	131	101	66	5	7,5	2	2,65
200	250	108	135	133	120	82	6,5	9,5	9,5	4,20
250	320	108	135	138	120	82	6,5	9,5	9,5	4,45
230	400	108	135	148	120	82	6,5	9,5	9,5	5,00
400	500	120	152	141	135	94	7	9,5	-	5,86
500	630	120	152	156	135	94	7	9,5	-	7,08
630	800	150	177	140	160	115	7	2	-	8,68
800	1000	150	177	160	160	115	7	2	-	11,5
1000	1250	150	177	183	160	115	7	2	-	14,4

Ta massima temperatura ambiente.
Interasse E-D.
Dimensione asola F.
Le dimensioni indicate sono espresse in mm.

Ta maximum temperature.
Wheelbase E-D.
Size buttonhole F.
The dimensions are measured in millimeters.